


NPort® 5600 Rackmount Series

8 and 16-port RS-232/422/485 serial device servers



- > 8 or 16 serial ports supporting RS-232/422/485
- > Standard 19-inch rackmount size
- > 10/100M auto-sensing Ethernet
- > Built-in 15 KV ESD protection for all serial signals
- > Easy IP address configuration with LCD panel
- > Choice of configuration methods: Web console, Telnet console, and Windows utility
- > Versatile socket operation modes, including TCP Server, TCP Client, UDP, and Real COM
- > SNMP MIB-II for network management

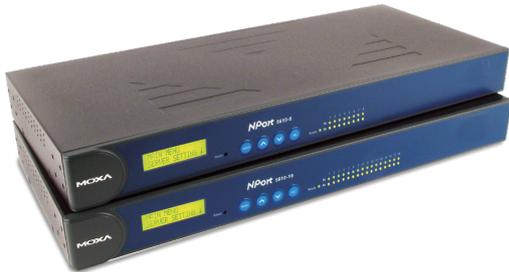

Overview

With the NPort® 5600 rackmount series, you not only protect your current hardware investment, but also allow for future network expansion by centralizing the management of your serial devices and distributing management hosts over the network.

Network Readiness for up to 16 Serial Devices

Only basic configuration is needed with the NPort® 5600 to connect up to 16 serial devices to an Ethernet network.

19-inch Rackmount Device Server

NPort® 5600 device servers come with Tx/Rx LEDs for the serial ports on the front panel, and 8 or 16 RJ45 serial port connectors on the rear panel. This makes the NPort® 5600 device servers suitable for standard 19-inch rack mounting, allowing you to simplify operation, maintenance, and administrative tasks.

Real COM/TTY Ports

Real COM/TTY drivers are provided to make the serial ports on the NPort® 5600 recognizable as Real COM ports by Windows, or Real TTY ports by Linux. In addition to supporting basic data transmission

and reception, the NPort® drivers also support the RTS, CTS, DTR, DSR, and DCD control signals.

LED Indicators to Ease Your Maintenance Tasks


The System LED, serial Tx/Rx LEDs, and Ethernet LEDs (located on the RJ45 connector) provide a great tool for basic maintenance tasks, and help engineers analyze problems in the field. The LEDs not only indicate current system and network status, but also help field engineers monitor the status of attached serial devices.

Adjustable Termination and Pull High/Low Resistors

When using termination resistors to prevent serial signal reflection, it is important to set the pull high/low resistors correctly so that the electrical signal is not corrupted. Since no set of resistor values is universally compatible for all environments, the NPort® 5600 has DIP switches on the bottom panel for setting the termination and pull high/low resistor values.



Appearance

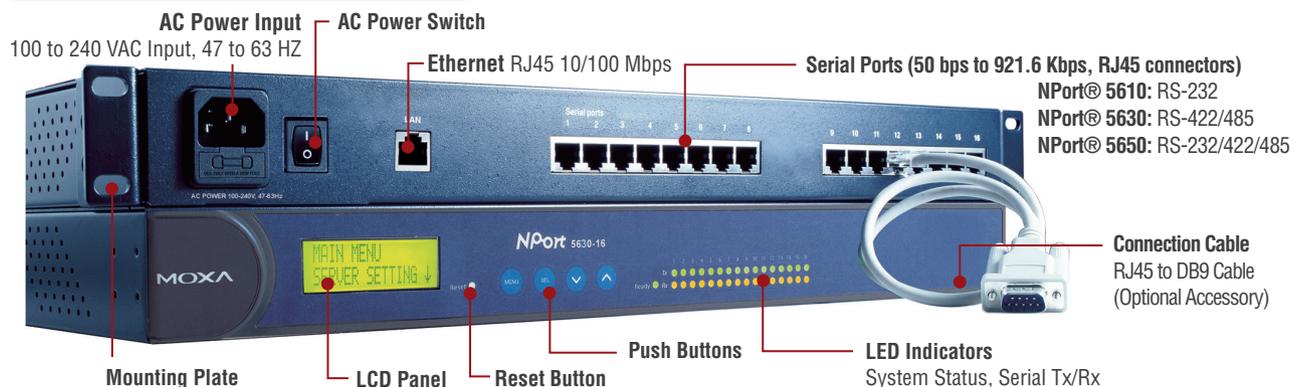

Specifications

Ethernet Interface

Number of Ports: 1

Speed: 10/100 Mbps, auto MDI/MDIX

Connector: 8-pin RJ45

Magnetic Isolation Protection: 1.5 KV built-in

Optical Fiber Interface

Distance:

Multi mode: 0 to 2 km, 1310 nm (62.5/125 μ m, 500 MHz*km)

Single mode: 0 to 40 km, 1310 nm (9/125 μ m, 3.5 PS/(nm*km))

Min. TX Output: -20 dBm (Multi mode), -5 dBm (Single mode)

Max. TX Output: -14 dBm (Multi mode), 0 dBm (Single mode)

Sensitivity: -34 to -30 dBm (Multi mode), -36 to -32 dBm (Single mode)

Serial Interface

Number of Ports: 8 or 16

Serial Standards:

NPort® 5610: RS-232

NPort® 5630: RS-422/485

NPort® 5650: RS-232/422/485

Connector: RJ45 (8 pins)

Serial Line Protection:

15 KV ESD protection for all signals

RS-485 Data Direction Control: ADDC® (automatic data direction control)

Pull High/Low Resistor for RS-485: 1 K Ω , 150 K Ω

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: DSR/DTR and RTS/CTS (RS-232 only), XON/XOFF

Baudrate: 50 bps to 921.6 Kbps

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx+, Tx-, Rx+, Rx-, GND

RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND

RS-485-2w: Data+, Data-, GND

Software

Network Protocols: ICMP, IP, TCP, UDP, DHCP, BOOTP, Telnet, DNS, SNMP V1/V2c, HTTP, SMTP, SNTIP, ARP, PPP, SLIP, RTelnet, RFC2217

Configuration Options: Web Console, Telnet Console, Windows Utility

Windows Real COM Drivers: Windows 95, 98, ME, NT, 2000, XP x86/x64, 2003 x86/x64, Vista x86/x64, 2008 x86/x64, Embedded CE 5.0/6.0, XP Embedded

Fixed TTY Drivers: SCO Unix, SCO OpenServer, UnixWare 7, UnixWare 2.1, SVR 4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i

Linux Real TTY Drivers: Linux kernel 2.4.x, 2.6.x

Mini Screen with Push Buttons

LCD Panel: Liquid Crystal Display on the case

Push Buttons: Four push buttons for convenient on-site configuration

Physical Characteristics

Housing: Metal, IP30 protection

Weight:

NPort® 5610-8: 3340 g

NPort® 5610-8-48V: 3160 g

NPort® 5630-8, 5650-8-S-SC, 5650-8-M-SC: 3380 g

NPort® 5650-8: 3360 g

NPort® 5610-16: 3420 g

NPort® 5610-16-48V: 3260 g

NPort® 5630-16: 3400 g

NPort® 5650-16: 3460 g

NPort® 5650-16-S-SC, 5650-16-M-SC: 3440 g

Dimensions:

Without ears: 440 x 45 x 198 mm (17.32 x 1.77 x 7.80 in)

With ears: 480 x 45 x 198 mm (18.90 x 1.77 x 7.80 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 75°C (-4 to 167°F)

Power Requirements

Input Voltage:

NPort® 5610/5630/5650: 100 to 240 VAC, 47 to 63 hz

NPort® 5610-48V: \pm 48 VDC (20 to 72 VDC, -20 to -72 VDC)

Power Consumption:

NPort® 5610-8/16: 141 mA @ 100 VAC, 93 mA @ 240 VAC

NPort® 5630-8/16: 152 mA @ 100 VAC, 98 mA @ 240 VAC

NPort® 5610-8/16-48V: 135 mA @ 48 VDC

NPort® 5650-8/16: 158 mA @ 100 VAC, 102 mA @ 240 VAC

NPort® 5650-8/16-S-SC: 164 mA @ 100 VAC, 110 mA @ 240 VAC

NPort® 5650-8/16-M-SC: 174 mA @ 100 VAC, 113 mA @ 240 VAC

Regulatory Approvals

EMC: CE (EN55022 Class A, EN55024), FCC Part 15 Subpart B Class A

NPort® 5610 only: IEC61000-4-12

Safety: UL (UL60950-1), TÜV (EN60950-1)

Medical: EN60601-1-2 Class B, EN55011

Reliability

Automatic Reboot Trigger: Built-in WDT (watchdog timer)

MTBF (meantime between failures):

NPort® 5610-8: 97294 hrs

NPort® 5610-16: 94928 hrs

NPort® 5610-8-48V: 96758 hrs

NPort® 5610-16-48V: 94417 hrs

NPort® 5630-8: 118405 hrs

NPort® 5630-16: 91483 hrs

NPort® 5650-8: 117584 hrs

NPort® 5650-16: 104767 hrs

NPort® 5650-S-SC-8: 116914 hrs

NPort® 5650-S-SC-16: 87528 hrs

NPort® 5650-M-SC-8: 116914 hrs


NPort® 5650-M-SC-16: 87528 hrs

Warranty


Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

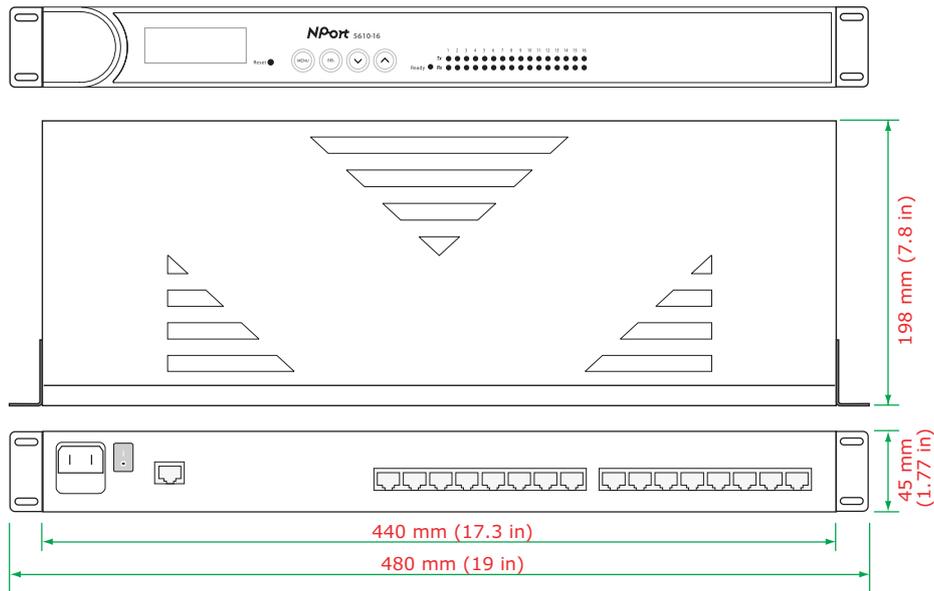

Pin Assignment (8-pin RJ45 connector)



NPort® 5610: RS-232

PIN	RS-232
1	DSR
2	RTS
3	GND
4	TXD
5	RxD
6	DCD
7	CTS
8	DTR

NPort® 5630: RS-422/485

PIN	RS-422/485-4w	RS-485-2w
1	---	---
2	---	---
3	TxD+	---
4	TxD-	---
5	RxD-	Data+
6	RxD+	Data-
7	GND	GND
8	---	---

NPort® 5650: RS-232/422/485

PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DSR	---	---
2	RTS	TxD+	---
3	GND	GND	GND
4	TXD	TxD-	---
5	RxD	RxD+	Data+
6	DCD	RxD-	Data-
7	CTS	---	---
8	DTR	---	---

Ordering Information

Available Models

- NPort® 5610-8:** 8-port RS-232 rackmount device server with RJ45 connectors and 100-240 VAC power input
- NPort® 5610-8-48V:** 8-port RS-232 rackmount device server with RJ45 connectors and 48 VDC power input
- NPort® 5630-8:** 8-port RS-422/485 rackmount device server with RJ45 connectors and 100-240 VAC power input
- NPort® 5650-8:** 8-port RS-232/422/485 rackmount device server with RJ45 connectors and 100-240 VAC power input
- NPort® 5650-8-M-SC:** 8-port RS-232/422/485 rackmount device server with RJ45 connectors and 100BaseF(X) multi-mode fiber (SC connector)
- NPort® 5650-8-S-SC:** 8-port RS-232/422/485 rackmount device server with RJ45 connectors and 100BaseF(X) single-mode fiber (SC connector)
- NPort® 5610-16:** 16-port RS-232 rackmount device server with RJ45 connectors and 100-240 VAC power input
- NPort® 5610-16-48V:** 16-port RS-232 rackmount device server with RJ45 connectors and 48 VDC power input
- NPort® 5630-16:** 16-port RS-422/485 rackmount device server with RJ45 connectors and 100-240 VAC power input
- NPort® 5650-16:** 16-port RS-232/422/485 rackmount device server with RJ45 connectors and 100-240 VAC power input
- NPort® 5650-16-M-SC:** 16-port RS-232/422/485 rackmount device server with RJ45 connectors and 100BaseF(X) multi-mode fiber (SC connector)
- NPort® 5650-16-S-SC:** 16-port RS-232/422/485 rackmount device server with RJ45 connectors and 100BaseF(X) single-mode fiber (SC connector)

Optional Accessories (can be purchased separately)

- CBL-RJ45F25-150:** 8-pin RJ45 to DB25 female cable, 150 cm
- CBL-RJ45M25-150:** 8-pin RJ45 to DB25 male cable, 150 cm
- CBL-RJ45F9-150:** 8-pin RJ45 to DB9 female cable, 150 cm
- CBL-RJ45M9-150:** 8-pin RJ45 to DB9 male cable, 150 cm

Package Checklist

- NPort® 5600 series device server
- Power Cord (see Appendix A)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card